

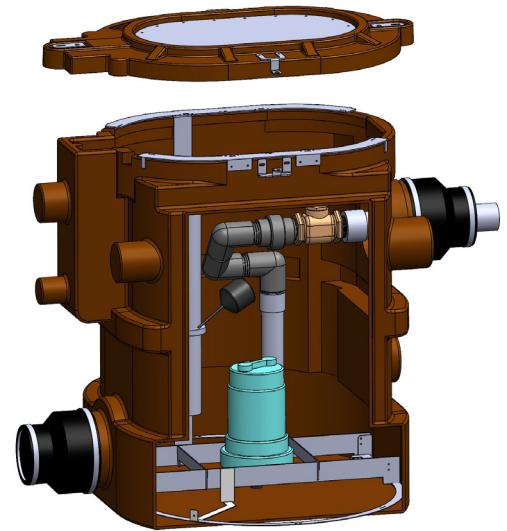
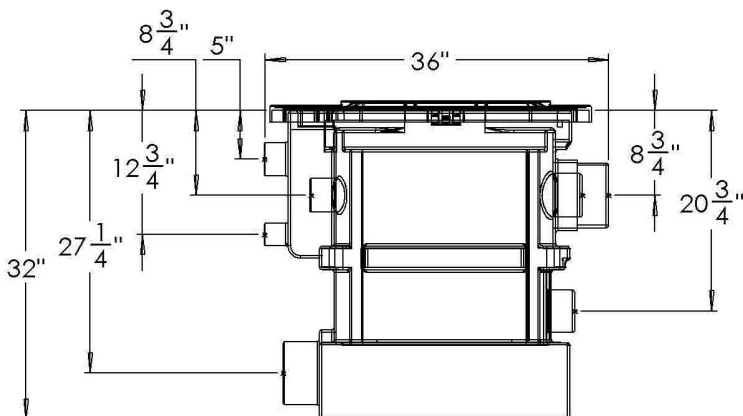


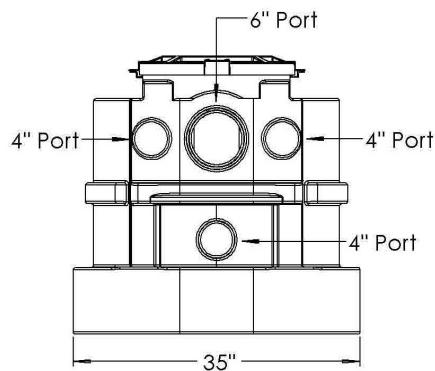


GL-TS75 Series Lift Station pumps greywater from a low-level greywater stub-out to the intake on the Flotender™ Processor

Includes:


- Thick-wall 75 Gallon LLDPE polyethylene housing with a bolted, gasketed, poly-steel lid
- 39 GPM 1/3 HP, 115V, 600W pump with float switch
- Provides for a high or low 4" greywater inflow, two 4" overflow options and multiple 3 inch venting options
- Accommodates one or two pump discharges to the Flotender™ Processor(s)
- 6" and 12" stackable extensions provide deeper bury depths as needed

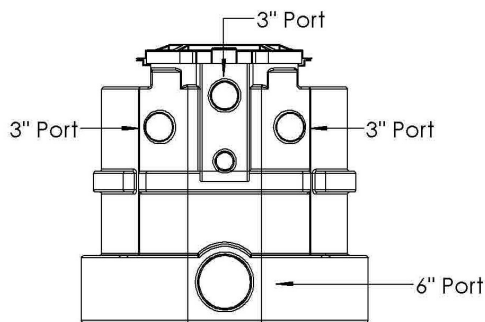

GL-TS75

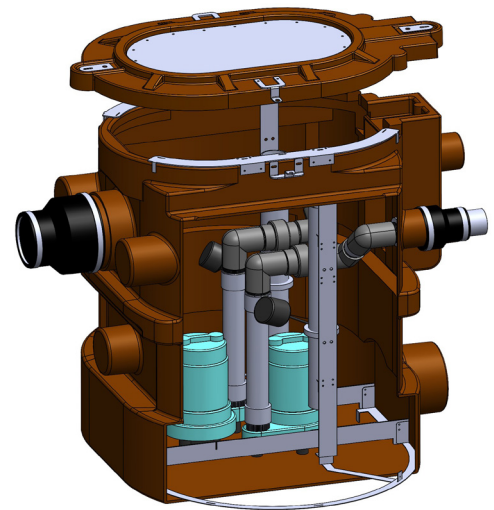

GL-TS75-DUPLEX

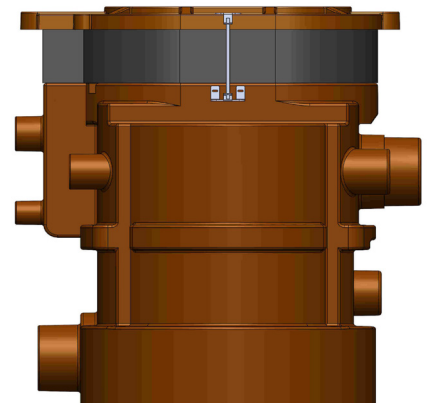

GL-TS75 With Extension